



A-Frame Ladder SGR080







(Set of 4) SHP724L



Balance Beams X3

SHP731



Round Plyometric Steps (Set of 3)





Over & Under Bars (Set of 4) SHP735







Horizontal Ladder SHP509





6 x 7 Cargo Net


SHP745

This unit offers the following:

- 1. Cargo Net Climb
- 2. Rope Climb

A fall attenuating surface is recommended for this Functional Fitness Rig.



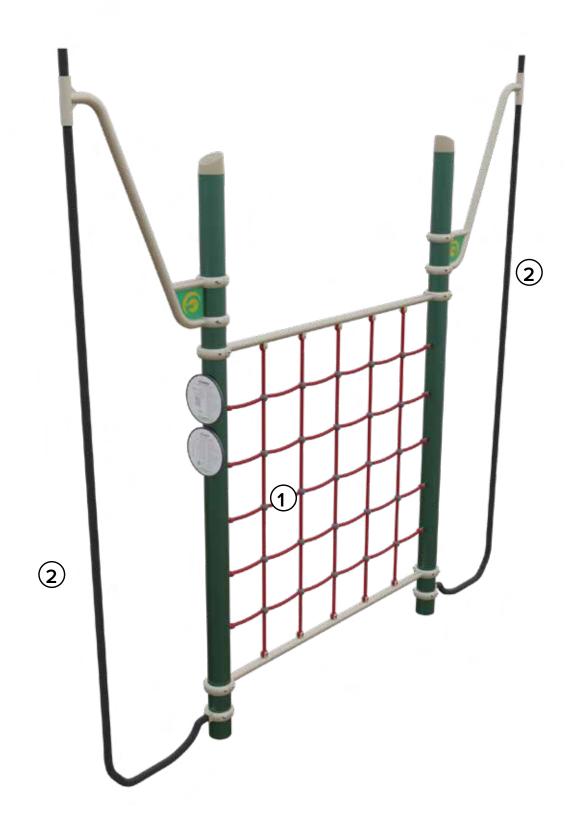







ENHANCE YOUR PACKAGE!

Greenfields offers these products and more for the best user experience



Shade canopy

Multi-level shade

Shade sails





Unit labels feature safety guidelines, exercise instructions and more!



2-Person Accessible Lat Pull SGR048W

Strengthens back muscles, shoulders, and arm muscles

(With wheelchair) Maneuver chair so back and bottom of seat are close to but not touching unit. Lock wheels. (Without wheelchair) Sit on seat with back against back rest and feet on footpegs. Grip

this exercise equipment.

Consult a physician prior to starting any physical fitness training program. Potential users with known adverse health conditions should not use this equipment. Before using the equipment, check for loose parts, breaks, cracks or other conditions needing attention.

Perform exercises according to instructions on each piece of the equipment. handles and pull towards shoulders. Hold and



his fitness equipment is designed for you joyment. For your safety, we ask you to mply with the following:

his apparatus. Parents / Guardians: Do not let your underag

Keep fingers, toes, and hair or other non-participant body parts away from equipment elements during

exercise.

I. Keep a safe distance from exercise equipment when in use by others.

Freenfields Outdoor Fitness, Inc. shall not be able for any personal injury to any person esulting from the use of this exercise




CUSTOMIZED ANNOUNCEMENT BOARD SGR105

This announcement board can be used to:

- State safety guidelines
- Acknowledge project donors/sponsors
- Encourage healthy lifestyle choices
- Provide sample workouts

Customization available at no charge (text, logos, etc.)







THE GREENFIELDS OUTDOOR FITNESS APP

The Greenfields App is the perfect companion to our multigenerational outdoor gyms, giving users the ability to search for gyms near their location, explore exercises available on Greenfields units, create workouts, and log their progress.

Now available on iOS and Android.



greenfieldsfitness.com/app-download/

EXPLORE

Search for gyms near you.












SCAN

Quickly find videos & more.



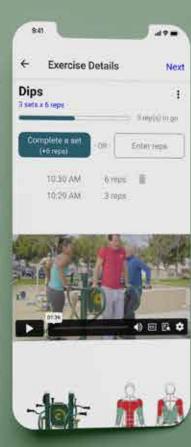



General Installation Instructions: In-Ground Embedded Footings





Video Demo:

https://gfoutdoorfitness.com/in-ground-installation/

The following information for contractors, maintenance personnel and supervisory staff will help ensure an accurate, safe and problem-free installation.



SUGGESTED MATERIALS

Please be advised that the use of decomposed granite surfacing (DG) is known to accelerate normal wear & tear of footrests.

- 2x4s: approximately four, 8' to 10' lengths per unit.
- All-Thread: 3/8" to 1/2", cut in 1' lengths, two pieces per embedded pipe.
- Nuts & Washers: to fit all-thread, four sets per embedded pipe.
- Stakes: metal/wood, approximately six per unit.
- Pavers/Cinder Blocks: 1 to 2 per unit.
- Tie Wire/C-Clamps
- Duplex Wood Nails/Dry Wall Screws
- Concrete: 3250 psi or better. Aggregate ratio: 3/8" to 3/4" in 1:3
- ratio. Concrete ratio: 1:3:2.5 of concrete, aggregate, and sand. Tools: cordless impact driver, skill saw, pliers, hammer, small sledge, magnetic level, tape measure, shovels, wheelbarrows.
- Plans/Drawings: schematic drawings and instructions for each

SITE PREP - Before equipment handling

- 1. Area should be fenced-recommend 6' temporary fencing, entire perimeter.
- 2. Ground should be thoroughly graded and "finished grade" accurately established, using either laser or string-line methods.
- 3. Prior to digging, entire site should be "laid-out" with all footings clearly marked as per plans.
- In the U.S. contact "Dig Alert" for clearance to dig, and follow all local construction regulations (fencing, dirt removal, etc.)
- Dig footings, closely following given dimensions.
- Remove dirt and debris from site, prior to placing units.





General Installation Instructions: In-Ground Embedded Footings



BASIC INSTALLATION GUIDELINES

UNITS ARE HEAVY (up to 450 lbs.) When unloading and handling, please exercise extra care to prevent injury or damage to the equipment.


- 1. All units must be fully assembled before installation
- 2. All screws must be attached using LocTite
- Do not drag units along the ground
- If missing parts or damaged items are noticed during installation, or should any assistance be required, please contact Greenfields immediately at 888-315-9037 x105.
- 5. All units MUST be fully assembled, leveled, and braced in place in the footing hole before any concrete is poured.
- A monolithic pour MUST be used for concrete. (All concrete must be poured at one time)
- Concrete requirement: 3250 psi or better.
- The top of the blue tape attached to the posts on the equipment is final top surface level.
- Brace units at the designated locations using the 2x4s. secured by c-clamps, all-thread or tie-wire. Use padding to avoid scratching powder coating.
- 10. Suggested safety zone is about 48" 60" perimeter around usage area (seats and moving parts). Clearance area may overlap with a nearby unit, as long as there is enough clearance to safely mount and dismount each unit.
- 11. Make sure all units are plumb and leveled Adhere to surfacing level (marked on units with blue tape)
- 12. Pour concrete
- 13. Clear concrete residue from post and other parts
- 14. Let concrete dry. It is recommended to wait a minimum of one week after concrete is poured before equipment is used.
- Remove supports
- 16. Touch up units using attached guide
- 17. Wrap units in black tarps until open to public
- 18. At the end of installation, toolbox and all documentation should be submitted to the local maintenance staff







SURFACE MOUNT WITH PIP DRAINAGE OPTIONS

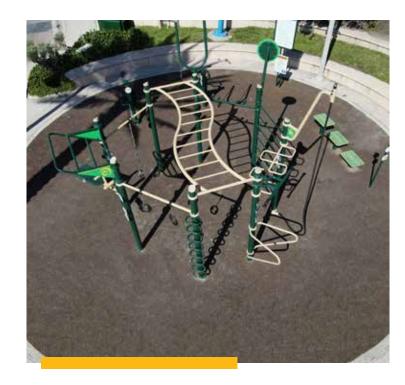










French Drain #1

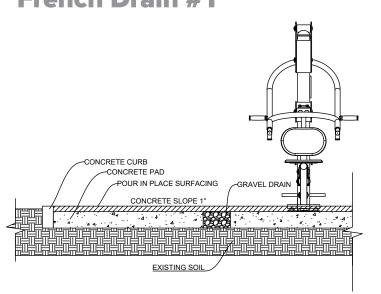


Curb Cutouts

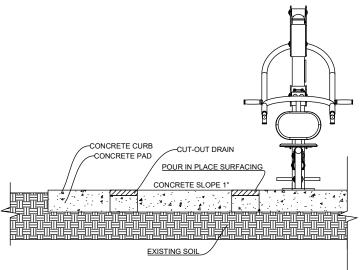

PIP Wrap-Around

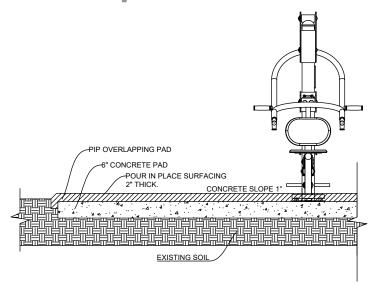

French Drain #2

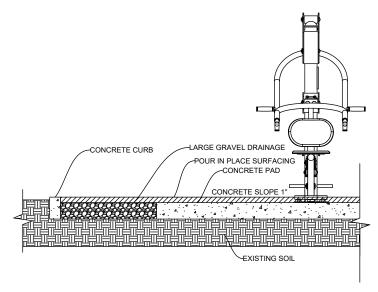



Inspection Checklist

General Guidelines for Outdoor Fitness Equipment



Questions? Please call 888-315-9037 x105

Inspection process				
Visual Inspection	Documentation			
☐ Internal Inspection	☐ Reporting			
Visual Inspection				
 Check all plastic footrests, backrests, manner, take photos and contact Gree 	seats, etc. for any cracks. If items are cracked in an unsafe enfields to order new pieces.			
	f wear, and make sure they are functioning correctly. If grips			
Inspect welds for any signs of wear. If	there is any damage, take photos and report to Greenfields			
	ns of wear or vandalism, and send photos if there is.			
If unsafe for public use, please wrap p maintenance is in progress.	ortion of that unit with a caution-tape to prevent use while			
Internal Inspection				
☐ Engage moving parts and ensure full, uninhibited functionality. If units are making noises when				
in use, do NOT lubricate the bearings. Greenfields for review.	. Check for any metal on metal contact and send photos to			
	pment is fully tightened. If screws are loose or missing,			
tighten or install new screws using a t	hread-locking compound. If new screws are needed, take			
	d and contact Greenfields to order new screws.			
	portion of that unit with caution tape to prevent use while			
maintenance is in progress.				
Documentation				
	ling amazing outdoor fitness gyms that are intended for use			
by the unsupervised masses in public	settings. We do realize that left unattended, units may be			
	e. We rely on the local maintenance staff to provide the			
necessary support in order to keep all come.	units and parts in optimal operating condition for years to			
☐ Please use the inspection log provided	d.			
_ 1 11110 110 110 110 110 110 100 100 10				
Reporting				
	is available to help with all inquiries. Please feel free to			
contact us at: csc@GreenfieldsFitr				
Please be sure to include photos and person with whom to communicate.	name of the park, city, state, country and on-site contact			
person with whom to communicate.				
n order to honor our commitment to quality and safety, Greenfields Outdoor I	Fitness reserves the right to make changes and revise the design specifications without notice. © 2022 Greenfields Outdoor Fitness, I			

Safety/Maintenance Inspection Log



Date	Location	Unit(s)	Describe Issue/ Action Taken	Name	Follow-up



WARRANTY

- Limited 10-year warranty on main post and metal structure
- Limited 5-year warranty on moving parts and bearings
- Limited 5-year warranty on seats and backrests
- Limited 3-year warranty on hydraulic pistons
- Limited 2-year warranty on footrests, armrests, rubber parts, and chains
- Limited 1-year warranty on battle ropes, climbing ropes, and suspension trainers

All warranties cover failure due to natural deterioration or manufacturing defects and do not include any cosmetic issues or wear and tear from normal use. This warranty does not cover cosmetic items such as scratches, dents, marring, fading, discoloring, weathering, wear and tear, or normal level of rusting. Warranty is valid only if the equipment is installed and maintained in conformity with Greenfields' installation and maintenance procedures furnished by Greenfields Outdoor Fitness. Equipment should not be exposed to any irrigation, especially with reclaimed water, as this will void the warranty. Equipment must be installed on a surface with proper drainage and or slope to prevent water buildup around the base of the equipment. Equipment should not be installed in basins or in low-lying areas which result in equipment being submerged. Equipment should be installed in a timely fashion after delivery; however if the equipment must be stored for an extended period of time, crates should be stored in a dry, indoor environment.

OTHER PRODUCT INFORMATION

Greenfields will continue to develop its line of products and therefore reserves the right to change the design specifications without notice. The equipment is designed for use by individuals weighing up to 300 pounds. The equipment is NOT intended to be used by individuals younger than 14 years of age unless supervised by adults. Greenfields' units are designed to accommodate the majority of users age 14 and above; however, due to the nature of outdoor fitness equipment, units are regarded as "one size fits most, but not all."

CUSTOMER SUPPORT

Upon written notification (email or fax) to Greenfields of a product's failure to conform to any of the aforementioned warranties during the applicable warranty period, Greenfields shall correct such failure/ nonconformity by repairing the defective part(s) or providing replacement part(s) within 60 calendar days of receipt of the notification. Greenfields shall ship the required replacement part(s) to the site free of charge, but will not be responsible for providing labor or the cost of labor for removing defective part(s) or installing replacement part(s). Greenfields will warranty the replacement part(s) for the remainder of the original warranty period. Furthermore, no representation, oral or written, of any

individual may be substituted for this exclusive limited warranty. To the extent permitted by law, Greenfields shall not be liable for any direct, indirect, special, incidental or consequential damages, which are expressly excluded from the sale of its product. To make claims under the terms of this warranty, please contact Greenfields' Customer Support Center at CSC@GreenfieldsFitness.com. Please include photos or video.

INSTALLATION

Greenfields' equipment is constructed from heavy steel pipes and is subject to heavy forces and torques when in use as intended. Extra care must be taken to ensure that the equipment is securely installed so that it can be safely enjoyed for years to come.

There are two methods of installation for the equipment:

- Surface mount installation with posts bolted to a reinforced concrete slab a minimum of 6"-8" thick (please refer to Installation Instructions & Video for detailed guidelines)
- Permanent in-ground installation in which the equipment post extensions are placed in concrete footings and use provided rebar pegs (please refer to Installation Instructions & Video for detailed guidelines)
 Installers and project managers are encouraged to contact Greenfields'
 Customer Support Center with any questions before and/or after installation. Detailed installations instructions are available for all products and are included in the Operations & Maintenance (O&M)
 Owner's Manuals which are shipped with every order.
 Often the installation of Greenfields products is assigned to the lowest bidding contractor. The contractor may not have been in contact with Greenfields prior to the project or seen the detailed Installation

Instructions. It is the responsibility of the project manager to ensure installing contractor is provided with the most updated set of Greenfields' Installation Instructions & Installation Video to ensure the validity of the warranty.

Should the project installer need a copy of the Installation Instructions,

please contact Greenfields' Customer Support Center at 888-315-9037 x105 or by email at CSC@GreenfieldsFitness.com.

SAFETY STANDARDS

This adult outdoor fitness equipment is not intended for use by unsupervised individuals younger than 14 years of age.

ASTM recently adopted ASTM F3101–15 Standard Specification for Unsupervised Public Use Outdoor Fitness Equipment.

While playgrounds are subject to laws in various states requiring compliance with ASTM and/or Consumer Product Safety Commission (CPSC) guidelines, at time of this publication, and to the best knowledge of the author, there are no state laws requiring compliance with standards set forth by ASTM for outdoor fitness equipment (nor with

CPSC guidelines, as none currently exist.) Play equipment can be certified to be in compliance with ASTM by the International Playground Equipment Manufacturers Association (IPEMA), and many agencies have a requirement that they only purchase equipment that is IPEMA certified. However, at this time, this is not possible with outdoor fitness equipment, as IPEMA does not currently certify compliance of outdoor fitness equipment. In addition, at this time there are no programs in place to train certified inspectors for outdoor fitness equipment. Without a state law that requires compliance, specifications are voluntary only. However, Greenfields Outdoor Fitness strives to comply with all of the voluntary specifications of ASTM F3101-15. Greenfields recommends adding a customized sign to each project to limit liability.

SURFACING MATERIALS

Over the years, Greenfields' product has been installed using the following types of surfacing: decomposed granite (aka DG or crushed granite), concrete, bonded rubber or poured-in-place surfacing, rubber tiles, asphalt, paver stones, and synthetic grass. Mulch, woodchips, beach sand, and sod have also been used but are not recommended with respect to wheelchair access. The type of surfacing used is ultimately the choice of the owner and their project manager. When it comes to Greenfields Functional Fitness Series, it is advised to use fall attenuating surfacing.

MAINTENANCE & EQUIPMENT UP KEEP

Greenfields Outdoor Fitness equipment is intended to be used by the unsupervised public in a variety of outdoor settings. Greenfields is extremely proud of the safe and durable design of its products, which are built to surpass their warranty under normal usage. Installations throughout the hemisphere prove this equipment's success in both hot and cold climates, as well as dry and humid conditions. While the units are designed to require, for the most part, little to no maintenance, Greenfields recognizes that heavy and constant usage will require a minimal level of maintenance which will be scheduled based on the specific nature of each project.

Installation on an ocean front, or with a direct line of sight to the ocean, will expose the units to salt and will require additional maintenance which is not required at inland sites or in dry climates. Such installations will require a regular fresh water rinse to remove the salt from the units (do not use reclaimed water - exposing the equipment to reclaimed water will void warranty). Greenfields recommends periodic inspection by a maintenance team to ensure each and every apparatus functions as intended. Please refer to the Periodic Inspection Checklist provided with the O&M Owner's Manuals.